



# 2x2 LED Slim Panel Light

## Even light at any height!





High CRI



Dimmable



### DIAGRAM

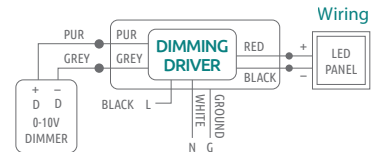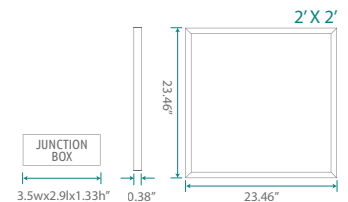

## FEATURES

**2'x2' ft 40W 4800lm**  
**120lm/W Lumens Efficacy**  
**DLC 4.2, eTLus listed**

- Dimmable
- 50,000 hour life
- Replaces 3 x F17T8 Fixture
- No ballast required
- Dimmable (0-10V)
- Glare-free polycarbonate diffused lens
- Suitable for damp locations
- Aluminum housing with PMMA lampshade
- No flicker, mercury free, instant on
- 5-year warranty

## APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom

## INSTALLATION

- Recessed
- Suspending
- Wall/Ceiling mount

## ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+50°C

ORDER CODE	DLC REFERENCE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	WT. (LB/PC)	MOL (MM)	CASE QTY.
L2922-402G	ET-22-40WD-100-40-2835	LED PANEL 2x2' 120v 40W 4K WH	40	120 V	4800	4000K	50,000	180°	80+	44	0.95	8.37	596wX596h	4
L2922-403G	ET-22-40WD-100-50-2835	LED PANEL 2x2' 120v 40W 5K WH	40	120 V	4800	5000K	50,000	180°	80+	44	0.95	8.37	596wX596h	4
<b>Optional Accessories</b>														
L2950-X10	-	LED Panel Suspension Kit Type #1												

Also available in 5500K and 6500K Non-DLC

Distributed by



To Place an Order Call: T. 1-289-201-7878 T.F. 1-888-368-7730  
 Email: [information@ubiquilux.com](mailto:information@ubiquilux.com) | Website: [www.ubiquilux.com](http://www.ubiquilux.com)  
 Ubiquilux Corp.: 511 Maple Grove P.O. Box 61032 Oakville, ON, L6J 7P5